


THE LEVELING LINE

JING-ZHANG AI INNOVATION BELT

Method: governance by closure error, and a circuit not yet closed

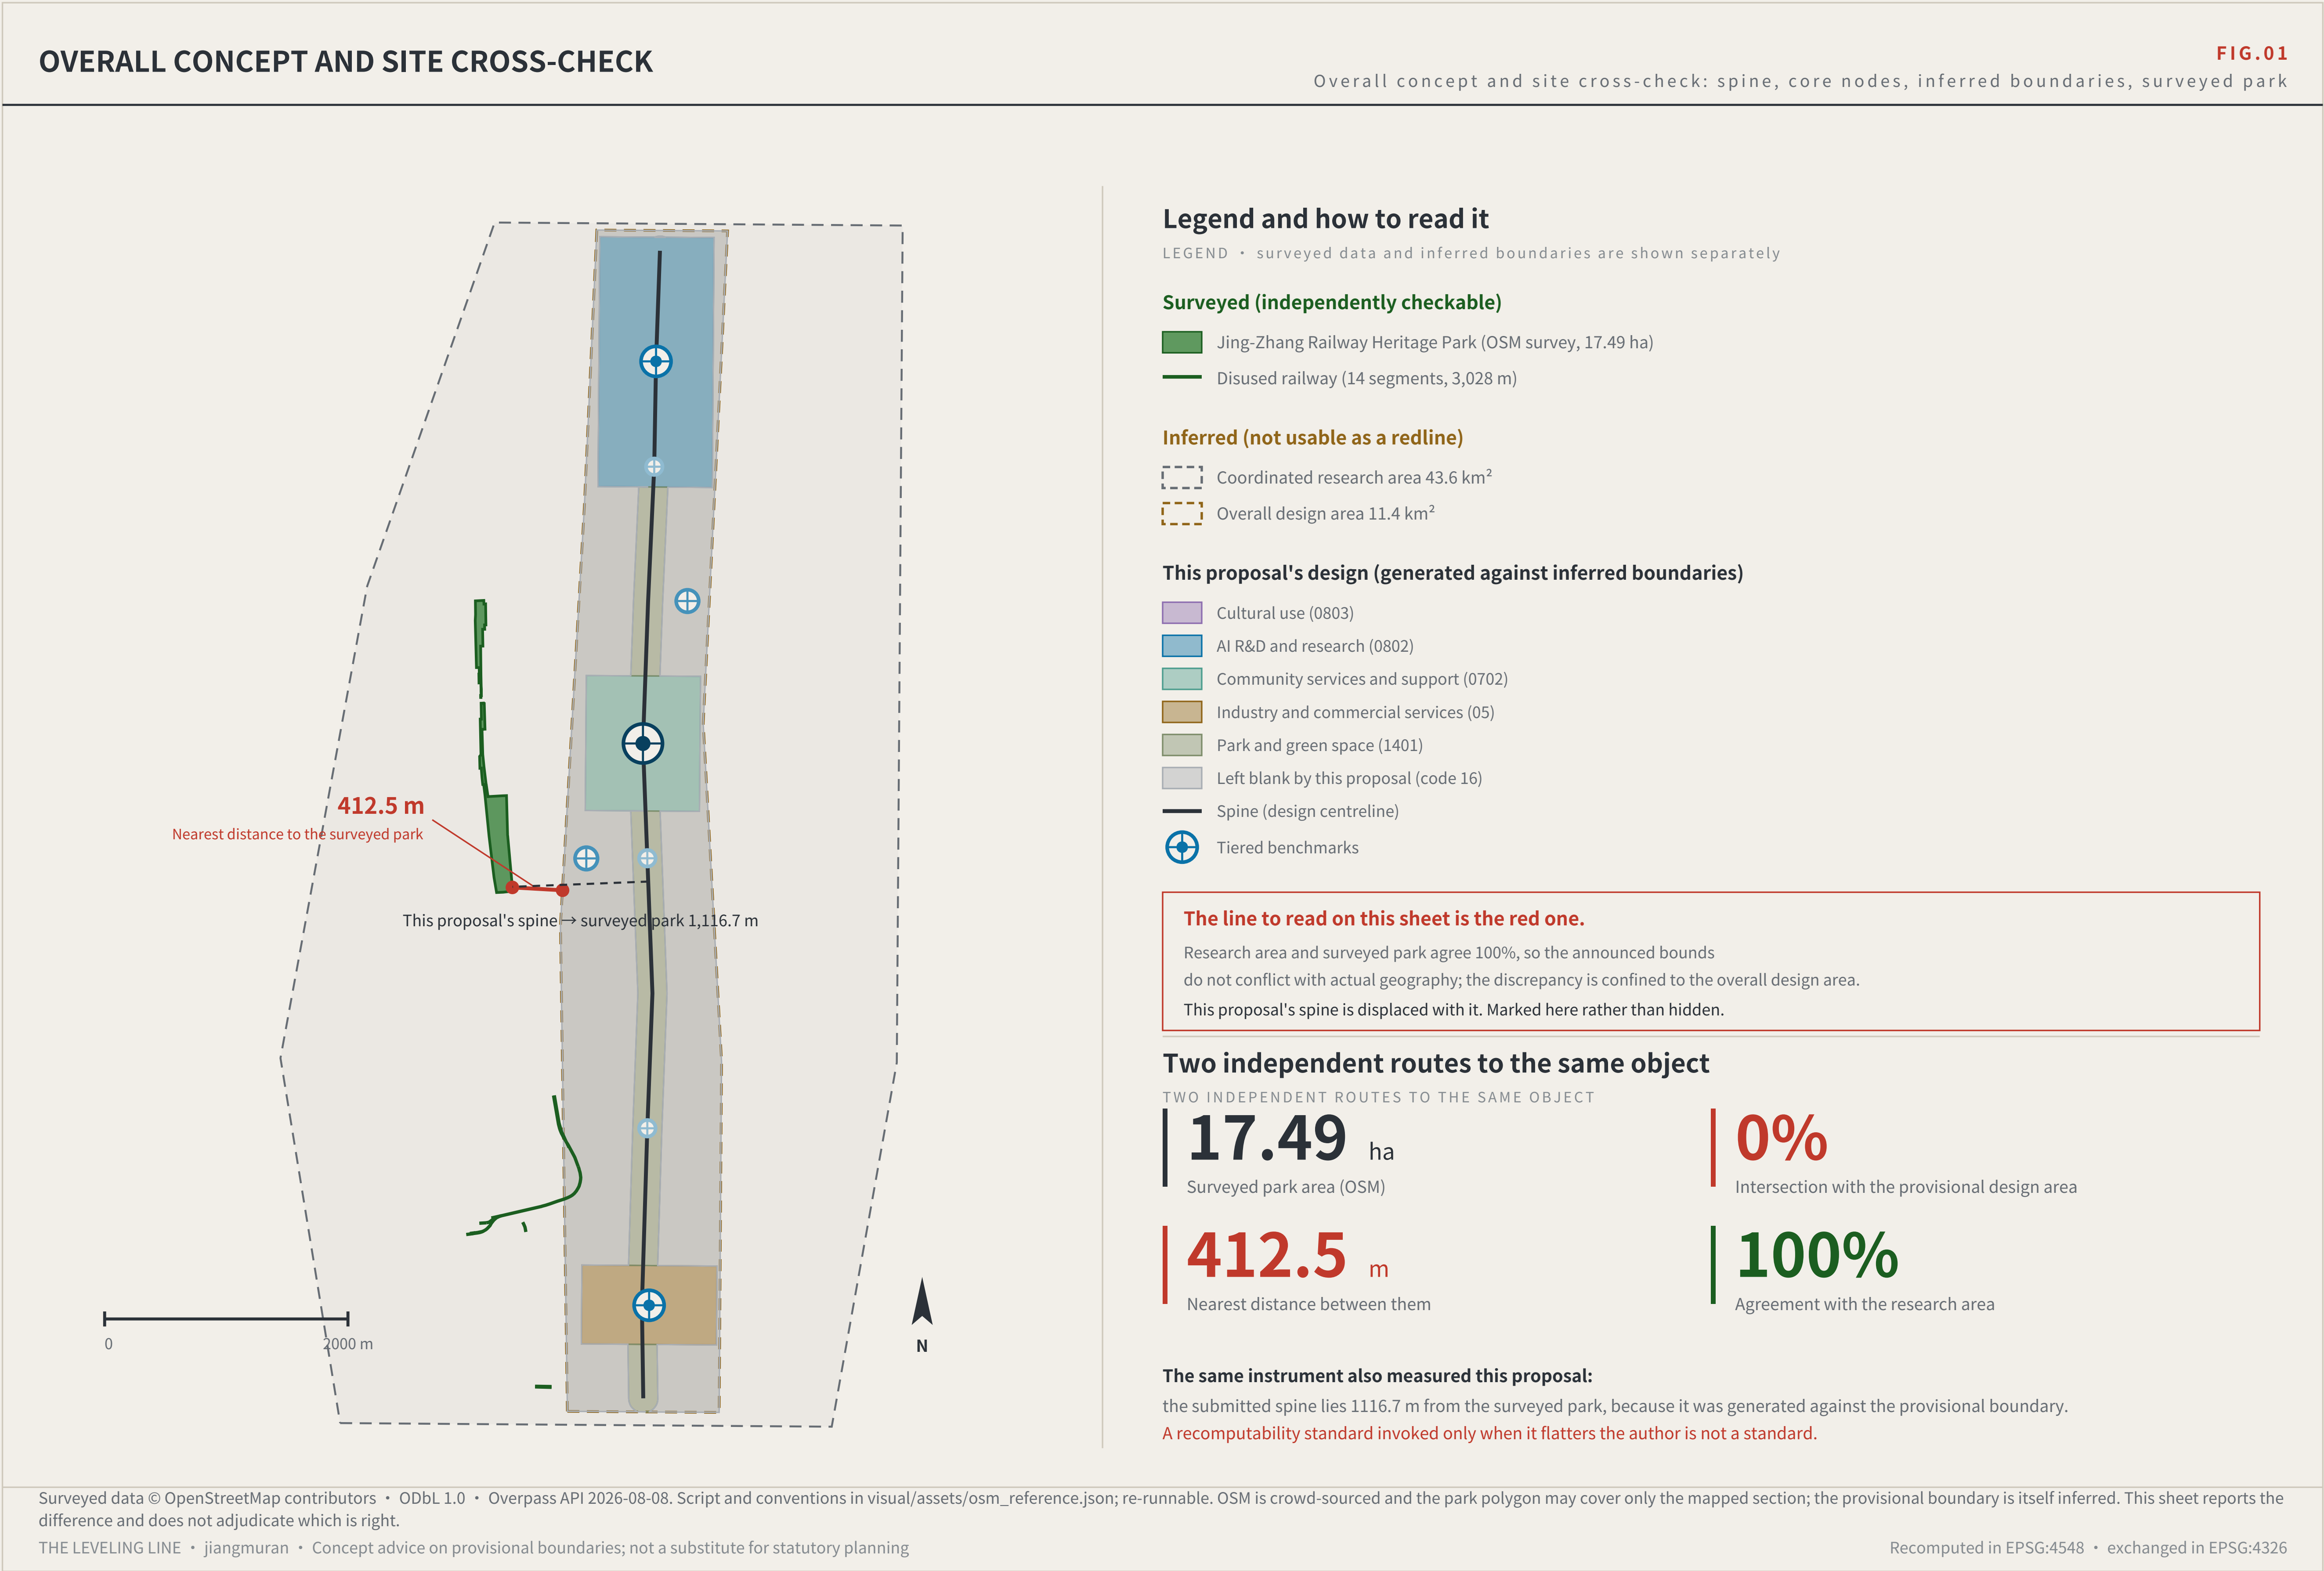

THE LEVELING LINE


JING-ZHANG AI INNOVATION BELT

Scope: three levels, key areas, and benchmark layout

THREE SCOPE LEVELS AND NETWORK TIERS

FIG.03

Three scope levels and network orders

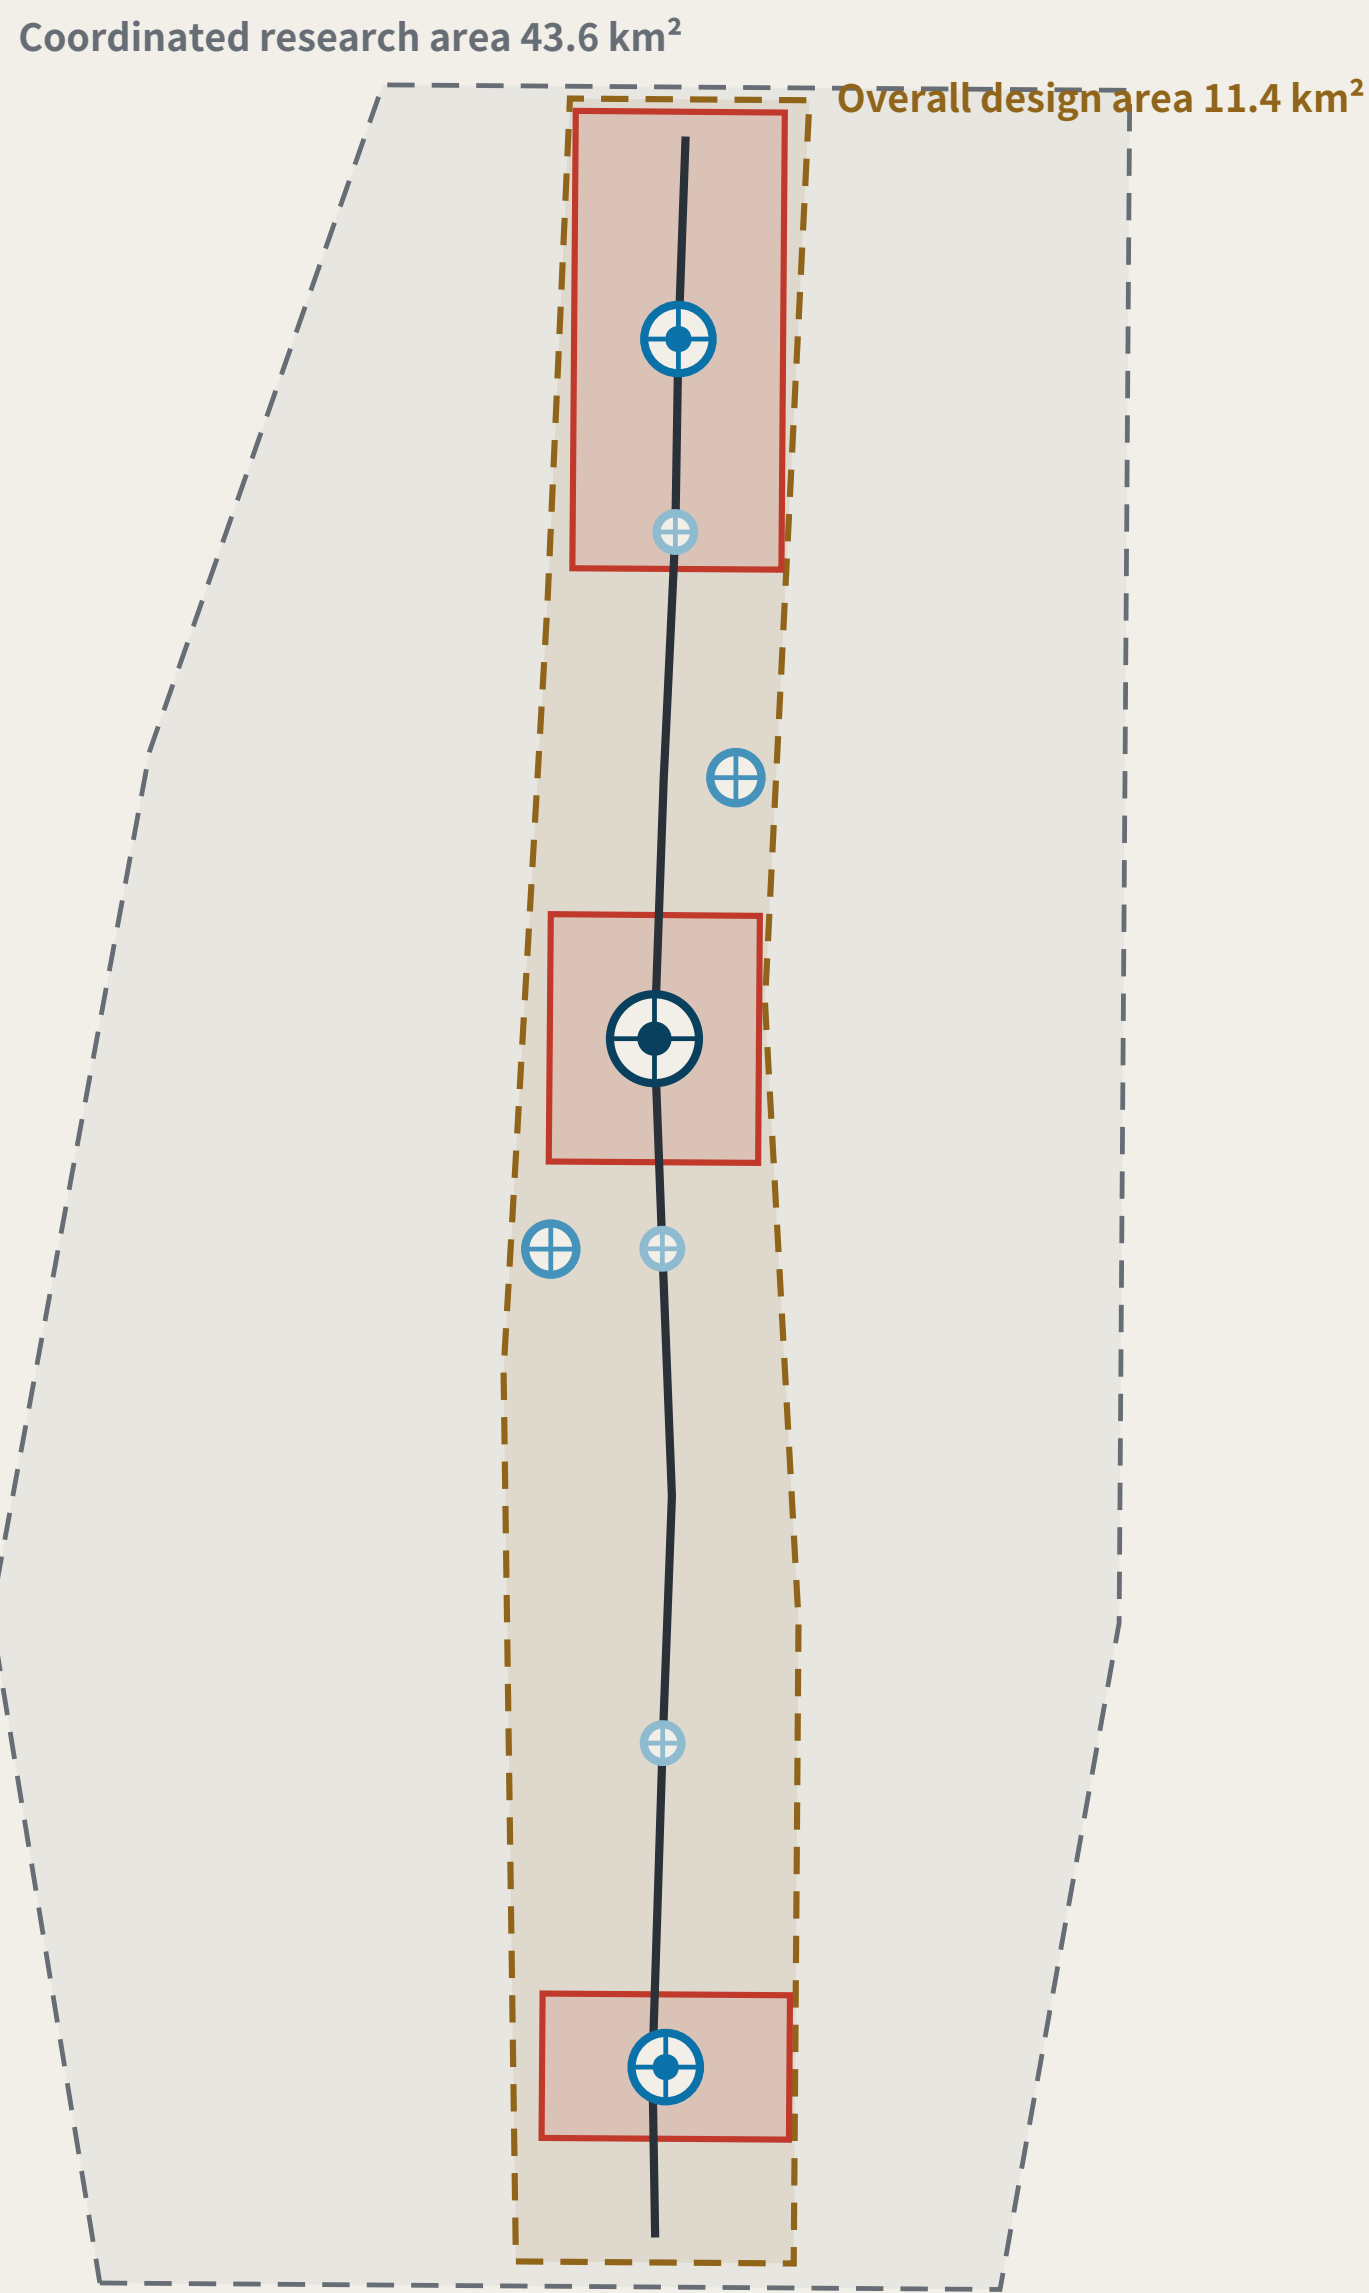

Plan, north up. All boundaries are provisional substitutes; official polygons are unpublished.

THREE SCOPE LEVELS MAPPED ONTO SURVEY ORDERS

SCOPE LEVELS AND NETWORK TIERS

Announcement level	Scale	Network role	Re-survey cycle
Coordinated research area	43.6 km²	Whole-network control	Annual
Overall design area	11.4 km²	First-order route: spine plus two closing routes	Semi-annual
Key areas	368.4 ha	First-order benchmarks BM-0 / BM-1 / BM-2	Quarterly

The three levels are not three unrelated drawing sets

The research area decides what to measure.

The design area decides which route to measure along.

The key areas decide where to set the stones.

Benchmark orders

BENCHMARK ORDERS

- Origin benchmark** Beyond monthly · annual origin and closure computation
- First-order benchmark** Quarterly re-survey
- Second-order benchmark** Monthly re-survey
- Third-order benchmark** Weekly re-survey

Any area, ratio or count that cannot be recomputed from a structured layer is not written as a conclusion.

Values this proposal deliberately does not give

DELIBERATELY WITHHELD

Floor area ratio · building height · density · setbacks · road redlines

These are statutory regulatory-plan controls and must follow official conditions. Giving numbers while official data is absent is fabricated certainty. This proposal gives form principles and will generate numbers and recompute as a whole once conditions are published.

These metrics are held at unknown in metrics.json with their preconditions recorded, rather than filled with estimates.

Layers: brief/site-package/geometry/provisional_boundaries.geojson, geometry/roads.geojson, public_space.geojson. Drawn by the accompanying scripts and recomputable (scripts in the accompanying issue). The three areas are taken from the announcement text; the geometry is a provisional substitute. THE LEVELING LINE · jiangmuran · Concept advice on provisional boundaries; not a substitute for statutory planning

Recomputed in EPSG:4548 · exchanged in EPSG:4326

KEY AREAS AND BENCHMARK LAYOUT

FIG.04

Three key areas and benchmark layout



CHAINAGE | SOUTH Xizhimen

K0

K1

K2

K3

K4

K5

K6

K7

K8

K9

NORTH Qinghe

0 1000 m

N

Benchmark orders

BENCHMARK ORDERS

- Origin benchmark** Beyond monthly · annual origin and closure computation
- First-order benchmark** Quarterly re-survey
- Second-order benchmark** Monthly re-survey
- Third-order benchmark** Weekly re-survey

Closure verdict

CLOSURE RULE

A scenario departs from BM-0, takes independent readings from a different party at each station along the closing route, and returns to BM-0 to compute.

- $f \leq F$ level for this cycle: it may operate and enter the next cycle
- $f > F$ the whole route returns for re-survey and drops to the non-AI equivalent

Amending only the worst station is not allowed. Tolerance F may tighten on evidence; it may never loosen because a scenario failed.

THREE KEY AREAS AND THEIR SURVEY ROLES

KEY AREAS AND SURVEY ROLES

- Dazhongsi AI Industry Cluster** BM-2 first-order benchmark | frequent reading point | AI-native consumption and business
- Beijing AI Origin Community** BM-0 origin benchmark | network origin and closure computation | public evidence hall and stone L1
- Zhongzhiyuan AI Autonomous Innovation Acceleration Area** BM-1 origin benchmark | station of origin | where tolerance F is set

Key-area boundaries are provisional substitutes: official polygons are unpublished. Shown dashed; not usable as a redline or as a precise-area basis.

Layers: geometry/key_areas.geojson, roads.geojson, public_space.geojson, green_space.geojson. Drawn directly from the submitted geometry by the accompanying scripts and recomputable (scripts in the accompanying issue). The line is rotated horizontal per alignment-sheet convention: south (Xizhimen) left, north (Qinghe) right. THE LEVELING LINE · jiangmuran · Concept advice on provisional boundaries; not a substitute for statutory planning

Recomputed in EPSG:4548 · exchanged in EPSG:4326

THE LEVELING LINE

JING-ZHANG AI INNOVATION BELT

Routes and scenarios: walking, blue-green, and the closing routes

SLOW MOBILITY, BLUE-GREEN AND CLOSING ROUTES

FIG.05

Slow mobility, blue-green and closing routes

Continuous blue-green corridor | 120 m buffer either side of the heritage-park spine



Two closing routes

CLOSING ROUTES

- North closing route RT-N**
BM-0 → BM-303 → BM-22 → BM-1 → BM-0

- South closing route RT-S**
BM-0 → BM-302 → BM-21 → BM-301 → BM-2 → BM-0

Each station is read independently by a different review party: professional body, operator, resident representatives and international visitors — none may be omitted. Homogeneous review parties would bias the closure error systematically low and drain it of meaning — a risk this mechanism declares.

Tolerance classes

TOLERANCE CLASSES

- F1 strictest** daily safety or administrative decisions with navigation · S06 low-speed robots · S10 safety review · S11 test field
- F2 Medium** individual rights · S02 walking breaks · S03 business desk · S05 authorisation chain · S09 demonstration street · S12 step-free
- F3 width** Information only · S01 open day · S07 open-source collaboration · S08 cultural guiding

SLOW MOBILITY AND THE BLUE-GREEN NETWORK

SLOW MOBILITY AND BLUE-GREEN

- Spine** A continuous walkable public axis; walking and cycling take priority **9,443 m**
- Green corridor** Buffered both sides of the spine, forming a continuous blue-green interface **120 m each side**
- Station-point unification** courses double as third-order benchmarks, so re-survey happens where footfall is densest **3**
- Universal before intelligent** access, lighting, drainage and shade are preconditions for deploying any smart facilities **Recondition**

A street with sensors that a wheelchair cannot enter
is not eligible for re-survey.

Layers: geometry/roads.geojson, green_space.geojson, public_space.geojson. Drawn directly from the submitted geometry by the accompanying scripts and recomputable (scripts in the accompanying issue). Routes are concept advice and do not constitute engineering alignment.

THE LEVELING LINE · jiangmuran · Concept advice on provisional boundaries; not a substitute for statutory planning

Recomputed in EPSG:4548 · exchanged in EPSG:4326

INNOVATION ECOSYSTEM AND ELEMENT MECHANISMS

FIG.08

Innovation ecosystem and element mechanisms

The chain of custody for innovation elements

ELEMENTS AND THEIR CHAIN OF CUSTODY

Every element answers the same three questions: which space carries it, which benchmark holds its reading, and what gets re-measured.

Element		Spatial carrier		Benchmark		Re-survey item
Land and space	→	Key-area renewal parcels	→	BM-1 / BM-0 / BM-2	→	Delivery rate of promised space
Compute	→	Consolidated compute nodes	→	BM-1	→	Share of public compute open to application
Data	→	Data-factor circulation venue	→	BM-2	→	Authorisation-chain completeness
Scenarios	→	Real-use venues in the two wings	→	BM-21 / BM-22	→	Enforceability of scenario exit
Funding	→	Zhongguancun technology-services wing	→	BM-21	→	Deliberately blank — see the note below
Talent	→	Talent district and third places	→	BM-0	→	Re-survey of service satisfaction

The funding row has no re-survey item. That is a judgement, not an omission.

Investment arrangements are decisions for market actors; an urban design proposal must not turn them into governance metrics, still less into fiscal commitments. Writing what is not yours to govern into a metric system is its own kind of overreach.

Six global cases, one question

SIX CASES, ONE QUESTION: WHAT MAKES ITS TRUST RE-MEASURABLE?

Numbering	Case	Trust mechanism	Re-measurable	Transferable point
C1	Algorithm registers	Public register of purpose, data, owner and appeal route	High	The information base for a benchmark plaque
C2	Risk-tiered AI legislation	Duties differentiated by risk class	Medium	Supports the tiered setting of tolerance F
C3	Standardised testing frameworks	Comparable reports from a common toolkit	High	Gives re-survey its technical form
C4	Algorithmic impact assessment practice	Mandatory ex-ante and ex-post review for high-risk uses	Med-high	Supports the strictest tolerance for health scenarios
C5	Civic data-stewardship practice	Data use decided by a citizen agenda	Medium	Supports public re-survey rights at third-order points
C6	Open-source reproducibility norms	Conclusions must ship a re-runnable artifact	High	This package ships a runnable verifier

All six point at the same gap: they register and they assess, but none institutionalises returning to the origin and computing.

A register says what a system declared; an assessment says what experts think. Neither answers how much the conclusion differs when the same public question passes through different nodes at different times.

Case material is drawn from public institutional documents and public reporting. Mechanisms only are cited: no text or images copied, no marks used, no non-public data, and no fabricated company lists, investment figures or output values. Element-to-space correspondence is in geometry/land_use.geojson and public_space.geojson.

THE LEVELING LINE · jiangmuran · Concept advice on provisional boundaries; not a substitute for statutory planning

Recomputed in EPSG:4548 · exchanged in EPSG:4326

